



STEAMCRAFT® GENERATOR STYLE HIGH SPEED CONVECTION STEAMERS

Project _____
Item 29.
Quantity _____
FCSI Section _____
Approval _____
Date _____

SteamCraft® Ultra 5

COUNTER TYPE DESIGN

PRESSURELESS CONVECTION STEAMER

ELECTRIC STEAM GENERATOR, 16 KW


Cleveland Standard Features

- Cooking Capacity for up to five 12" x 20" x 2½" deep Cafeteria Pans.
- **Innovative PowerPak Electric Steam Generator:** Two Special Stainless Steel Fire Bar Heating Element. Strong 14 Gauge Stainless Steel Construction. Large 5 gallon generator reservoir for faster steam cooking production. Fully insulated rear mounted steam generator.
- **Easy Access Cleaning Port:** Generator Cleaning Port located on the outside, top of the unit. Not necessary to remove hot panels or pan rack guides.
- **Instant Steam Stand By Mode:** Hold generator at a steaming temperature. Allows unit to start cooking instantly.
- **Durable 14 Gauge, Stainless Steel Construction:** For compartment door, cavity and steam generator.
- **One 60 Minute Electro-Mechanical Timer and Switch for manual operation:** Audible signal for cooking time completion.
- **Main Power On/Off Switch:** With Automatic Water Fill.
- **Exclusive Steam Cooking Distribution System:** Maintenance Free Exclusive Brass Steam Jets produce a high velocity convection steam without fans. Coved Corner design in cooking compartment distributes heat evenly, and is easy to keep clean. Creased top & bottom enhance drainage. Cold water condenser behind drain maintains a dry steam. Fully Insulated cooking compartment for thermal efficiency. Removable Stainless Steel Slide Racks for easy cleaning.
- **Automatic Generator Drain:** Contains a "Water Jet" Spray Rinse Drain Cleaning Cycle to keep drain clear.
- **Exclusive Automatic Remote Probe Type Water Level Control:** Separate from the generator for easy access.
- **Exclusive "Cool to the Touch" Two-Piece Compartment Door Design:** Free floating inner door with reversible gasket provides an air tight seal. Stainless Steel Slam/Latch Door Latch mechanism for reliability.
- **Left Hand Door Hinging:** Compartment Doors hinged on the left, controls on the right.
- Available in most voltages, three phase only.

Options & Accessories

- ☒ Right hand Door Hinging, Controls on the Left (DHR)
- ☐ Electronic Timer with Compensating Load Feature (ETC)
- ☐ ON/OFF Steam Switch for compartment controls (MC)

MODEL: ☒ 21-CET-16

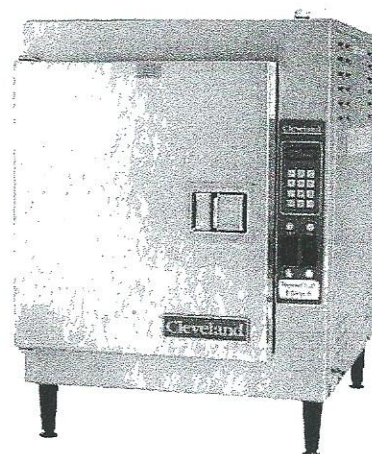


Shown with optional
Electronic Timer

Short Form Specifications

Shall be CLEVELAND, SteamCraft® Ultra 5, one compartment, Counter-Type Steamer, Model 21-CET-16, _____volts, 16.5 KW, _____Hz, 3 phase, heavy duty all Stainless Steel construction; rear mounted, insulated Steam Generator with Remote Probe Type Water Level Controls and Automatic Steam Generator Blowdown with "Water Jet" Drain Cleaning feature.

- ☒ 34" (864mm) High Stainless Steel Economy Stand, for one 21-CET-16 (UniStand34)
- ☐ POSK Pull-Out Shelf Kit for UniStand (P/N 111724)
- ☐ URK Pan Rack Kit UniStand (P/N 111726)
- ☐ 4" Stainless Steel Legs (LF4)
- ☐ Equipment Stacking Stand Shelf Type (ES2446)
- ☐ Dissolve® Descale Solution, 6 one gallon container w/quart markings (106174)
- ☐ Compartment Door Steam Shut Off Switch (SCS)
- ☐ Cafeteria Pans in depths of 1", 2½" and 4"
- ☐ Water Filters

SECT. IV. PAGE 5
0612

Item	Qty	Description	Sell Each	Sell Total
28	1	EXISTING Model No. CONV. OVEN		
29	1 ea	 STEAMER, CONVECTION COUNTERTOP Cleveland Range Model No. 21CET16 Steamcraft® Ultra 5 Convection Steamer, electric, Countertop, 1 compartment, (5) 12 x 20 x 2-1/2" pans/compartment capacity, automatic water level and generator drain controls with 60-minute mechanical timer and bypass switch for constant steaming, stainless steel construction, 16 kW 1 1-year limited warranty, standard 1 ea 9797-50CT CT KLEENSTEAM® Filter System for counter top steamers, (1) 4CB5 5 micron carbon block (9617-11), (1) SS10 Scalestick cartridge (9799-0201) & (2) ScaleKleen 7.0 oz. packets (9796-20) (note: two are needed for double stack applications), for counter steamer 1 (VOS1) 208v/60/3-ph, 45.9 amp, 3-wire, standard 1 ea ES2446 Equipment Stand, (2) shelves, 24" X 29", 48" high, stainless steel construction, for (2) 21CET8 or (1) 21CET8 & (1) 21CET16 or (2) 21CET16 steamers (P/N 1054251) 2 ea 9618-11 7CB5 Replacement cartridge (1 pack)	10,233.00	10,233.00
31	1	EXISTING Model No. HOT FOOD WARMER Safety System Moveable Gas Connector Kit, 3/4" inside dia., 48" long, covered with stainless steel braid, coated with blue antimicrobial PVC, 1 SnapFast™ QD, 1 full port valve, (2) 90° elbows, coiled restraining cable with hardware, limited lifetime warranty		
32	1	EXISTING Model No. REF. Safety System Moveable Gas Connector Kit, 3/4" inside dia., 48" long, covered with stainless steel braid, coated with blue antimicrobial PVC, 1 SnapFast™ QD, 1 full port valve, (2) 90° elbows, coiled restraining cable with hardware, limited lifetime warranty		
33		Spare Number		
34	1	EXISTING Model No. REF		

Beltram South Inc.